




EL 71

## FEATURES

- Low service costs
- Long life
- Available in all climate classes
- Graphics (option)
- Accessories including baskets - see page 64

| EL |

**RELIABLE STORAGE**

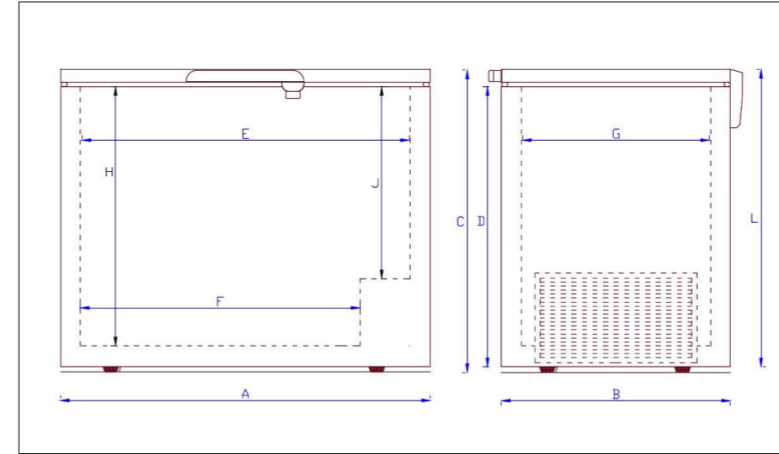

	EL 12	EL 22	EL 35	EL 45	EL 53	EL 61	EL 71
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +31
Gross volume, litres	110	215	347	447	527	607	701
Net volume, litres	98	205	331	427	504	580	670
Temperature range inside unit	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22
Standard refrigerant	R600a	R134a	R134a	R134a	R134a	R134a	R134a
Refrigerant available: R600a / R290/ R134a	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h (kwh) at 18 deg	0,49	0,71	0,9	1,05	1,3	1,52	1,95
Input power (watt):	52	124	141	146	211	211	245
<b>DIMENSIONS</b>							
External dimensions (WxDxH)	545x590x840	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865	1805x695x865
Internal dimensions (WxDxH)	400x400x670	606x536x697	936x536x697	1186x536x697	1386x536x697	1586x536x697	1686x576x741
Dimension A	545	725	1055	1305	1505	1705	1805
Dimension B	590	655	655	655	655	655	695
Dimension C	840	865	865	865	865	865	865
Dimension D	770	780	780	780	780	780	780
Dimension E	400	606	936	1186	1386	1586	1686
Dimension F	220	406	736	986	1186	1386	1486
Dimension G	400	536	536	536	536	536	576
Dimension H	670	697	697	697	697	697	741
Dimension J	465	447	447	447	447	447	491
Dimension L	825	850	850	850	850	850	850
Insulation, mm	65	60	60	60	60	60	60
<b>ACCESSORIES</b>							
Dividers	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Baskets Incl.	1	1	2	2	3	3	3
Max. Number of basket possible	1	1	2	3	4	4	6
Castors	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Lock	n/a	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Thermometer	n/a	Optional	Optional	Optional	Optional	Optional	Optional
<b>OTHER DATA</b>							
Outer cabinet	White	White	White	White	White	White	White
Inner cabinet		Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option		Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Type of cooling	Static	Static	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual	Manual	Manual
Power	220 v/50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Thermostat	Analog	Analog	Analog	Analog	Analog	Analog	Analog
Freezing capacity kg/ 24 h	6,5	15	22	27	36	38	43
Light in Lid	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Calendar in Lid	n/a	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Net weight, kg	31	43	54	64	67	77	85
Gross weight, kg	34	46	58	68	71	82	89
<b>SHIPPING</b>							
20' cont. Capacity	112	42	30	24	20	18	14
40' cont. Capacity	228	90	64	50	46	40	30
40' HC cont. Capacity	228	126	88	62	61	52	42
Standard Trailer capacity	276	102	74	60	52	44	42

\*Handle for EL 12 is integrated in the lid.



EL 12



EL 22



EL 35



EL 45



EL 53



EL 61